



HYDROHAMMER®

THE HYDRAULIC IMPACT HAMMER FOR ALL COASTAL & CIVIL PROJECTS

IQIP is a reliable and experienced service partner for all pile driving operations, both onshore and nearshore. In the Coastal & Civil markets, IQIP provides pile driving equipment and advice for the construction of stable foundations for bridges and jetties, harbours and quay walls, as well

as building foundations. More than 30 years' experience prioritising the development of innovative solutions for the most complex construction projects within these market segments, makes IQIP a reliable industry leader.

HYDROHAMMER®

THE HYDRAULIC IMPACT HAMMER FOR ALL COASTAL & CIVIL PROJECTS

For the Coastal and Civil Markets, two types of hammers are available, the S Series and the SW Series.

S SERIES HYDROHAMMER®

IQIP's reliable and world-renowned, first generation Hydrohammer S Series, was developed in the early 80's and has been deployed for use on Onshore construction, Oil & Gas and Offshore Wind projects the world over. The S Series is known for its unique robust design and its reliability in the field. Over 30+ years, multiple ranges of hammers in the S Series have been developed to cater for all types of piling and foundation work. The S Series ranges from S-30 to S-2000 and is available for rent and purchase.

SW SERIES WATERHAMMER

The Waterhammer runs on water as a hydraulic oil alternative, which makes it an environmental friendly hammer. By using only water as medium, there will be no chance of hydraulic oil spills. This makes it also possible to use the hammer in areas where oil spill risk reduction is a high environmental project requirement. Besides this advantage, the hammer can also be used in several markets. While it's designed for deep water and the Oil & Gas market, it has also been used in Coastal & Civil river and harbour projects. In addition, the Waterhammer is simple to control in the same way as our standard Hydraulic hammers with no energy or performance loss.

IQIP SUPPORTS YOUR OPERATIONS FOR ACCURATE AND EFFICIENT PILE DRIVING

DRIVEABILITY AND ADVISORY SERVICES

The correct choice of hammer can only be made after careful interpretation and assessment of the properties of the soil. To support customers, IQIP employs a team of experienced engineers to assist with pre- and post-pile driving analysis. These driveability studies are carried out

using the most sophisticated computer programs (GeoWave). Driveability studies are performed for a best estimate but also take into account an upper bound situation. In the upper bound situation, a 30% higher soil resistance is accounted for, which gives a good indication of the expected driveability.

HAMMER CONTROL AND MONITORING

All hydraulic hammer functions are electronically controlled and monitored by our new generation control and monitoring system. This system focuses on automatic pile driving based on the desired pile velocity, blow rate and blow energy, making the system flexible and easy to use.

Highlights of the system include:

- Maximisation of equipment utilisation and efficiency.
- Wireless digital communication and control.
- Increasing equipment reliability and lifespan through comprehensive diagnostics.
- Data registration and reporting system for project data, settings, configuration and important measurements.
- Integration of documentation in the control system.

MIQIP CUSTOMER PORTAL

MIQIP is a globally connected platform that will provide you with operational intelligence on your foundation installation assets. Hammer operators, project managers and service crew have direct access to all information needed for efficient and reliable reporting. MIQIP makes jobsite preparation possible from the comfort of your office. The portal provides an up to date transparent overview of the documentation and certification and enables you to easily push piling plans and equipment spreads configurations to the selected C-36 control units.



DRIVING FREE HANGING RAKED PILES AT FULL ENERGY

JETTIES

Whether they are unloading LNG, oil carriers or berthing vessels, in order to provide an invaluable service, jetties must be able to withstand the full force of nature. Therefore, choosing and installing the foundation in an optimum way is critical. Using the Hydrohammer can prove to be a perfect solution for installing either steel or concrete foundation piles.


RAKED PILE DRIVING

The majority of jetties consist of a series of bents of raked steel piles, driven into the ground. Traditional methods for raked pile driving are inefficient due to their inability to compensate for the loss of gravitational force. This is not the case with the Hydrohammer. By adjusting the gas pressure


above the ram's piston head, the ratio between the energy delivered by gravity and by gas energy can be adjusted. When driving raked piles, the gas pressure is increased to compensate for the loss of gravitational force. Battered piles up to a rake of 1:1 (45 degrees) can therefore be driven at full energy. It is even possible to drive horizontally.

LIGHTWEIGHT HAMMER

The ram weight of the Hydrohammer S series is relatively light in comparison to its competitors, and the hammer receives a substantial part of its power from acceleration due to the gas pressure on top of the piston. This greatly increases its handling and makes it ideal for constructing jetties.

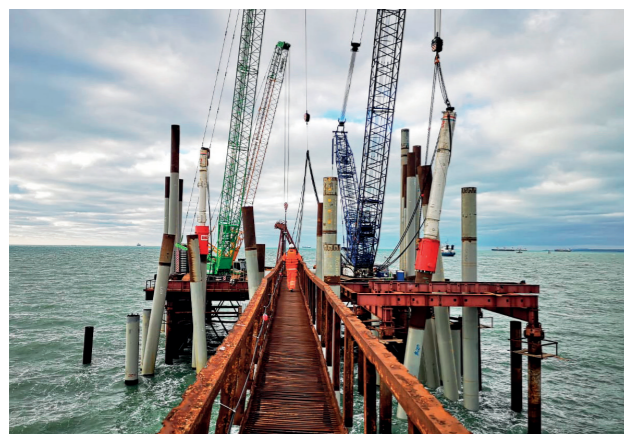

S Series Hydrohammer

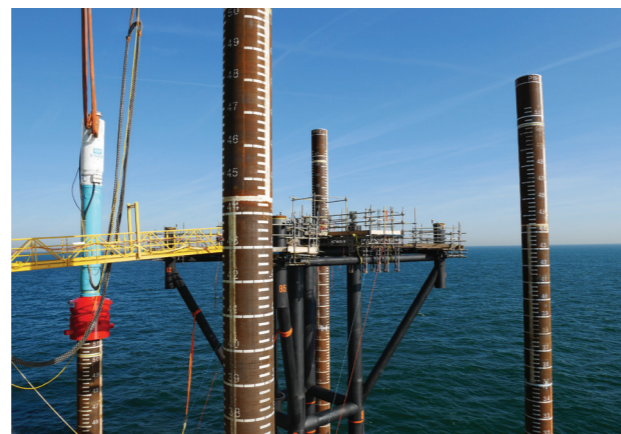

SW Series Hydrohammer

HYDROHAMMER®

THE HYDRAULIC IMPACT HAMMER FOR ALL COASTAL & CIVIL PROJECTS

HARBOURS

When it comes to installing foundations and quay walls for complex maritime projects, steel structures are the best solution. As a result of its unique design, the Hydrohammer is perfectly suited to driving steel piles and essential for a successful installation.

SPECIAL SOLUTIONS

Driving clutched piles is possible with a specially designed clutch sleeve. With this sleeve, the use of a follower or dolly to drive clutched piles is no longer required, making pile driving more cost-effective and efficient. The clutch sleeve also reduces the weight by up to 10t, depending on the follower length. To prevent additional costs incurred as a result of damage to the coating of piles during pile driving, IQIP can equip the inside of the sleeve with synthetic material.



WELL EQUIPPED FOR ALL HARBOUR-RELATED PILING WORKS

IDEAL SOLUTION FOR PILE DRIVING ON ALL BRIDGE PROJECTS

BRIDGES

The foundations of a bridge are of critical importance. Not only must they support the entire weight of the bridge, they are also required to withstand dynamic loads, and be resistant to earthquakes. Over the past few decades, upscaling the sizes of bridges and their foundations has become necessary due to heavier traffic and increasing traffic flow.

LARGE DIAMETER PILES

For IQIP, large diameter piles are common practice. Offshore, we have vast experience driving the biggest monopiles with a diameter of up to eight metres. We've taken this experience onto dry land, and are capable of driving any pile size required with our wide range of hammers and sleeves. Our S-600 Hydrohammer is used frequently for bridge foundation works all over the world. One of the biggest hammers ever supplied for a bridge foundation project is the S-2000 Hydrohammer.



LET'S BUILD

HYDROHAMMER®


THE HYDRAULIC IMPACT HAMMER FOR ALL COASTAL & CIVIL PROJECTS

SHEET LEGS


When equipped with sheet legs, the Hydrohammer is the perfect tool for driving sheet piles. The legs provide the required stability when driving sheet piles in a free-riding mode and eliminate the need for a leader. Many different types of profiles can be driven this way, from single and double sheet piles to single and double H-beams, combi walls, and more.

POLYGONAL ANVIL


Another new development is the polygonal anvil. Its special shape enables it to drive a wide range of sheet piles with maximum coverage. This ranges from the small profiles, with a width of 500mm (for example, Hoesch L25) to the big profiles, measuring 700mm in width or 750mm. We have developed sheet legs for our S-30, S-40, S-70, S-90, S-120 and S-150 Hydrohammer models. The solid one-piece upper section has a high rigidity. These sheet legs can be used with the polygonal anvil for double sheet piles, and with an anvil for single sheet piles.



Coverage with the polygonal anvil at the profile L25



Coverage with the polygonal anvil at the profile AZ 40-700



Coverage with the polygonal anvil at the profile AU 26


SHORT SHEETLEG SET

The latest development for driving sheets is the short sheetleg set.

With this set, a construction is made which pushes the guiding shoes to the sheet with just enough force to stabilize the hammer, with no extra acceleration to the hammer sheetleg construction. This, in combination with the anvil, suitable for double sheets of 1.6m, provides the opportunity to drive all of the new series of sheets.

With this type of sheetleg, the hammer is more stable on the sheets, reducing misalignment and resulting in efficient energy transfer from the hammer to the sheets with less wear and tear. Additionally, the sheet can be driven closer to the soil level which eliminates the need to remove the soil along the sheet pile wall.

DRIVE ALL TYPES OF SHEET PILES AND PROFILES

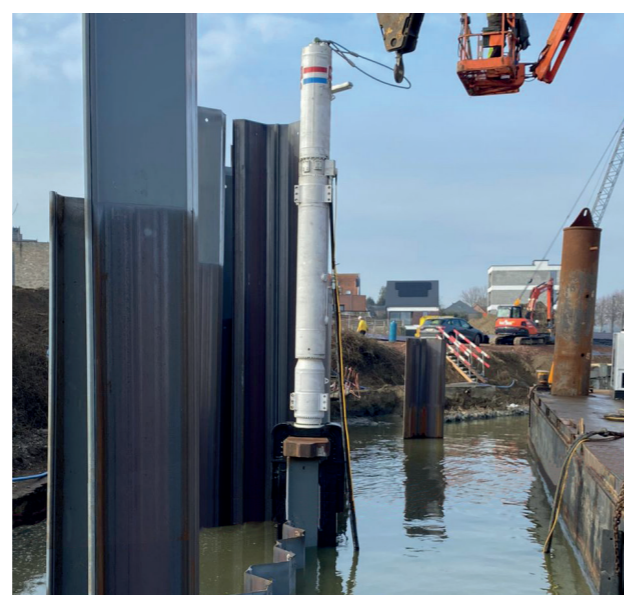

HIGH IMPACT AND VERSATILE ROCK BREAKING WITHOUT EXPLOSIVES

ROCKBREAKING

Equipped with a chisel set, the Hydrohammer becomes a highly effective and powerful rock breaker. It is able to produce the high impact force necessary for breaking rock, cemented layers, concrete floors and slabs.

CHISEL WITH HOUSING

The Hydrohammer can be used as a rock breaker both on land and underwater. It is fitted with a special sleeve that features an internal anvil and a chisel. After being driven into the rock, the hammer and chisel are lifted and moved to the

next spot. Delivering upward blows and lifting the hammer at the same time strongly facilitates the retraction of jammed chisels.

THE SYSTEM

To withstand heavy resistance, the Hydrohammer must be properly guided in a leader-guide profile. This operating criterion secures the central alignment of the chisel and hammer for optimum energy transfer between ram/anvil and chisel. The position of this leader profile should be fixed during breaking and extracting.

OPERATING METHODS

The Hydrohammer has proven its reliability for rock breaking projects, and IQIP offers other equally reliable handling equipment which can be used to lift and position the rock breaker and leader profile, including a piling rig, excavator or backhoe, or a cutter dredger. The choice depends predominantly on the equipment available for the project, and on water depth.

ROCK HARDNESS

The average compressive strength that a normal cutter dredger can handle is 40MPa. To date, rocks with a hardness up to 230MPa have been successfully broken using an S-70 Hydrohammer to punch vertical holes in a relatively level surface.



HYDROHAMMER®

THE HYDRAULIC IMPACT HAMMER FOR ALL COASTAL & CIVIL PROJECTS

CAST-IN-SITU TECHNIQUE

1. The steel casing is placed on the steel cover plate
2. The steel casing is driven to final penetration level
3. A reinforcement cage is placed inside the (empty) steel casing
4. Concrete is poured inside the steel casing
5. The steel casing is extracted by force, in combination with small blows downwards – or even upwards
6. A concrete pile with a high bearing capacity is in place



DRIVEN CAST-IN-SITU PILES



ADVANTAGES CAST-IN-SITU

One of the unique features of the Hydrohammer design – besides its sturdiness and high level of controllability – is its ability to facilitate the extraction of casings that have already been driven. This means that only one hammer is needed for both driving and extracting, making the Hydrohammer ideal for handling cast in-situ (vibro) piles.

HIGH BLOW RATE WITH MINIMAL ENERGY

During extraction, the Hydrohammer can achieve a blow rate of 280bpm with minimal energy. These small vibrations in the casing create the tractive force required to pull the casing out of the ground. In case of extremely high friction, the Hydrohammer, in combination with the pulling force of the crane can even give upward blows to overcome the soil friction.

VERY ECONOMICAL AND HIGH BEARING CAPACITY



This technique is very economical compared to precast piles, since reinforcement is installed after tube installation instead of being designed with respect to transport and handling, as pile length is not limited by transport. On request, concrete can be delivered within a few hours by a concrete mixer truck, which prevents the storage of precast piles and makes it easier to reach the job site. The reinforcement of pile shaft can be increased at the top of the pile. Due to an increased end bearing and optimal friction along the shaft, a high bearing capacity is usually achieved. Allowable pile loads can be extremely high. Another advantage is that the adjustable pile length can be determined at the job site.

HORIZONTAL PILE DRIVING

Pipes and piles are usually driven vertically, but in some instances horizontal piling is required. Horizontal piling requires powerful tools to deliver the amount of driving power or cutting capacity needed. As a result of two unique features in the design of the hydraulically driven and gas accelerated ramweight of the Hydrohammer, it is possible to operate under every inclination – even horizontally. The Hydrohammer is not only capable of installing piles and pipes horizontally, but it can also be used to remove disused piles and pipes from the ground.

HYDROHAMMER ADVANTAGE

- Requires only a relatively small excavation.
- Used extensively for driving piles up to almost 5 metres in diameter.
- Faster tube installation progress.
- Ability to remove disused service lines and tubes.
- No modifications to the Hydrohammer are required.
- Safer operation – working tool is outside the tube, not inside.

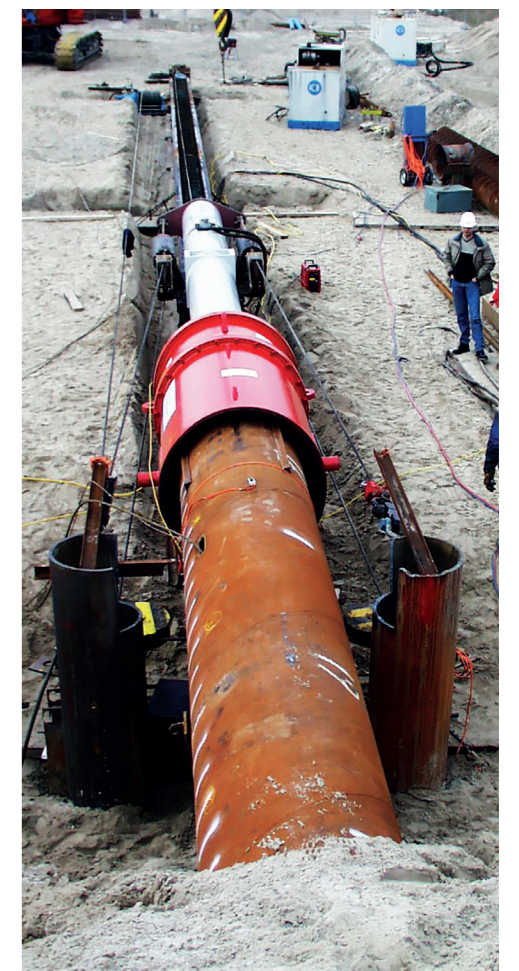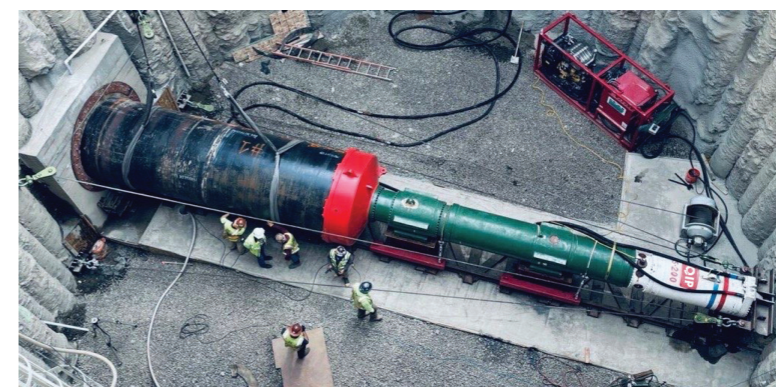

LET'S BUILD

HYDROHAMMER®
THE HYDRAULIC IMPACT HAMMER FOR ALL COASTAL & CIVIL PROJECTS

NOISE MITIGATION

To ensure a safe working environment and minimise damage due to noise pollution when piling with the Hydrohammer, IQIP offers an optional noise reduction system. This consists of an enclosure at the point of impact, and bellow sections around the pile. The design was developed in collaboration with the Dutch research institute TNO. Noise levels can be reduced by 15dB(A), which is a great improvement for noise emission levels on today's construction sites. Our noise reduction system is available for free-hanging and leader-guided pile driving.

REDUCTION IN dB(A)	REDUCTION IN SOUND POWER	REDUCTION EXPERIENCE BY HUMAN EAR
1,25	25 %	Not audible
3	50 %	Just audible
10	90 %	Half as much sound compared to the original sound
15	97 %	Even less than half sound compared to the original sound



Folded bellow



Bellow extracted

PULSE®

PULSE, a modular addition to the Hydrohammer, minimises noise during pile driving to deliver an environmentally-friendly foundation installation. The elongated blow of PULSE is twice the duration of the blow of a conventional hammer, increasing piling efficiency while reducing pile fatigue and impact noise. PULSE can be adapted for different conditions and is able to perform at maximum peak force. Combine PULSE with the Hydrohammer for an efficient and environmentally-friendly installation with reduced noise, pile fatigue and operating costs.



EFFICIENCY HYDROHAMMER®


HAMMER COMPARISON

Most piling hammers are rated by their potential energy. However, the Hydrohammer is rated by its kinetic energy. Furthermore, steel-to-steel energy transfer ensures an extremely high peak force in the pile. Therefore, it is incorrect to only compare hammers on (potential) energy. In order to make an accurate comparison between the

different hammer types, the actual ability of a hammer to overcome soil resistance is far more important than its rated energy. The below table compares energy between the different hammer types based on the driveability.



Hydrohammer®: steel to steel energy transfer

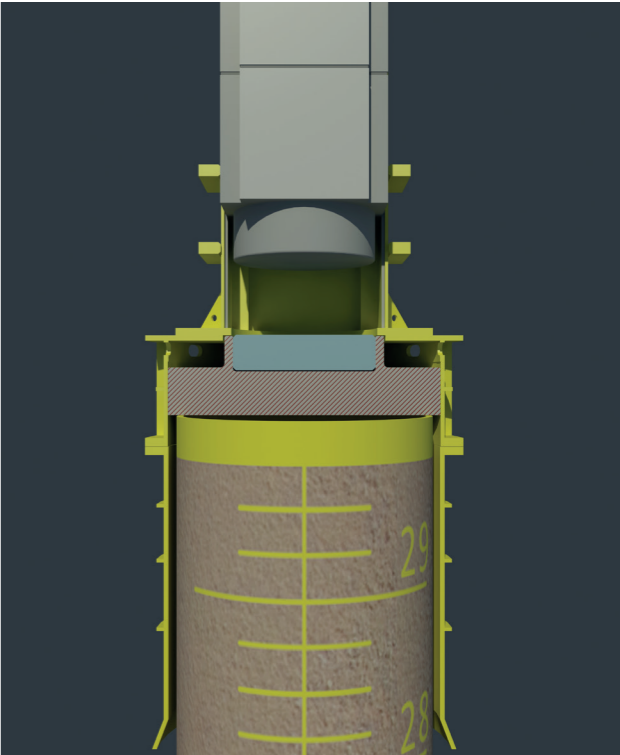

Diesel and conventional hydraulic hammer: energy transfer with cushion

COMPARISON ON ENERGY NEEDED

HAMMER TYPE	S-30	S-40	S-70	S-90	S-120	S-150	S-200	S-280	S-350	S-500
	kNm (kJ)									
Steel to steel (Hydrohammer®)	30	40	70	90	120	150	200	280	350	500
Diesel hammer	72	98	170	220	290	366	488	785	920	1220
Conventional hydraulic hammer	40	57	100	130	170	216	289	400	504	675

HAMMER TYPE	S-30	S-40	S-70	S-90	S-120	S-150	S-200	S-280	S-350	S-500
	kip.ft									
Steel to steel (Hydrohammer®)	22	30	52	66	89	111	148	207	258	369
Diesel hammer	53	72	125	162	214	270	260	579	679	900
Conventional hydraulic hammer	30	42	74	96	125	159	213	295	372	498

HYDROHAMMER®

THE HYDRAULIC IMPACT HAMMER FOR ALL COASTAL & CIVIL PROJECTS

- HYDROHAMMER
1.

Connection plate
2.

Piston
3.

Accumulator
4.

Upper bearing
5.

Valve ring
6.

Hammer housing
7.

Upper leader attachment
8.

Ram
9.

Lower bearing
10.



Lower leader attachment
11.

Shock absorber
12.

Pile sleeve
13.

Anvil
14.

Pile

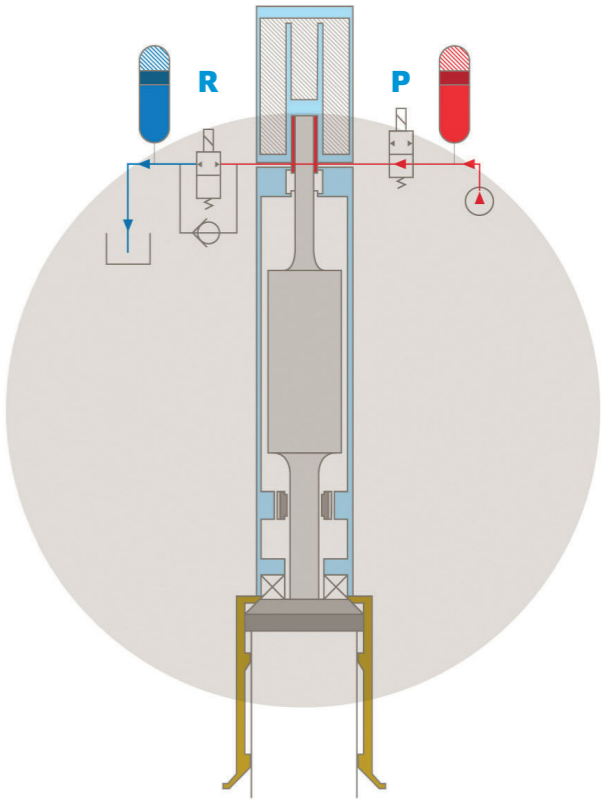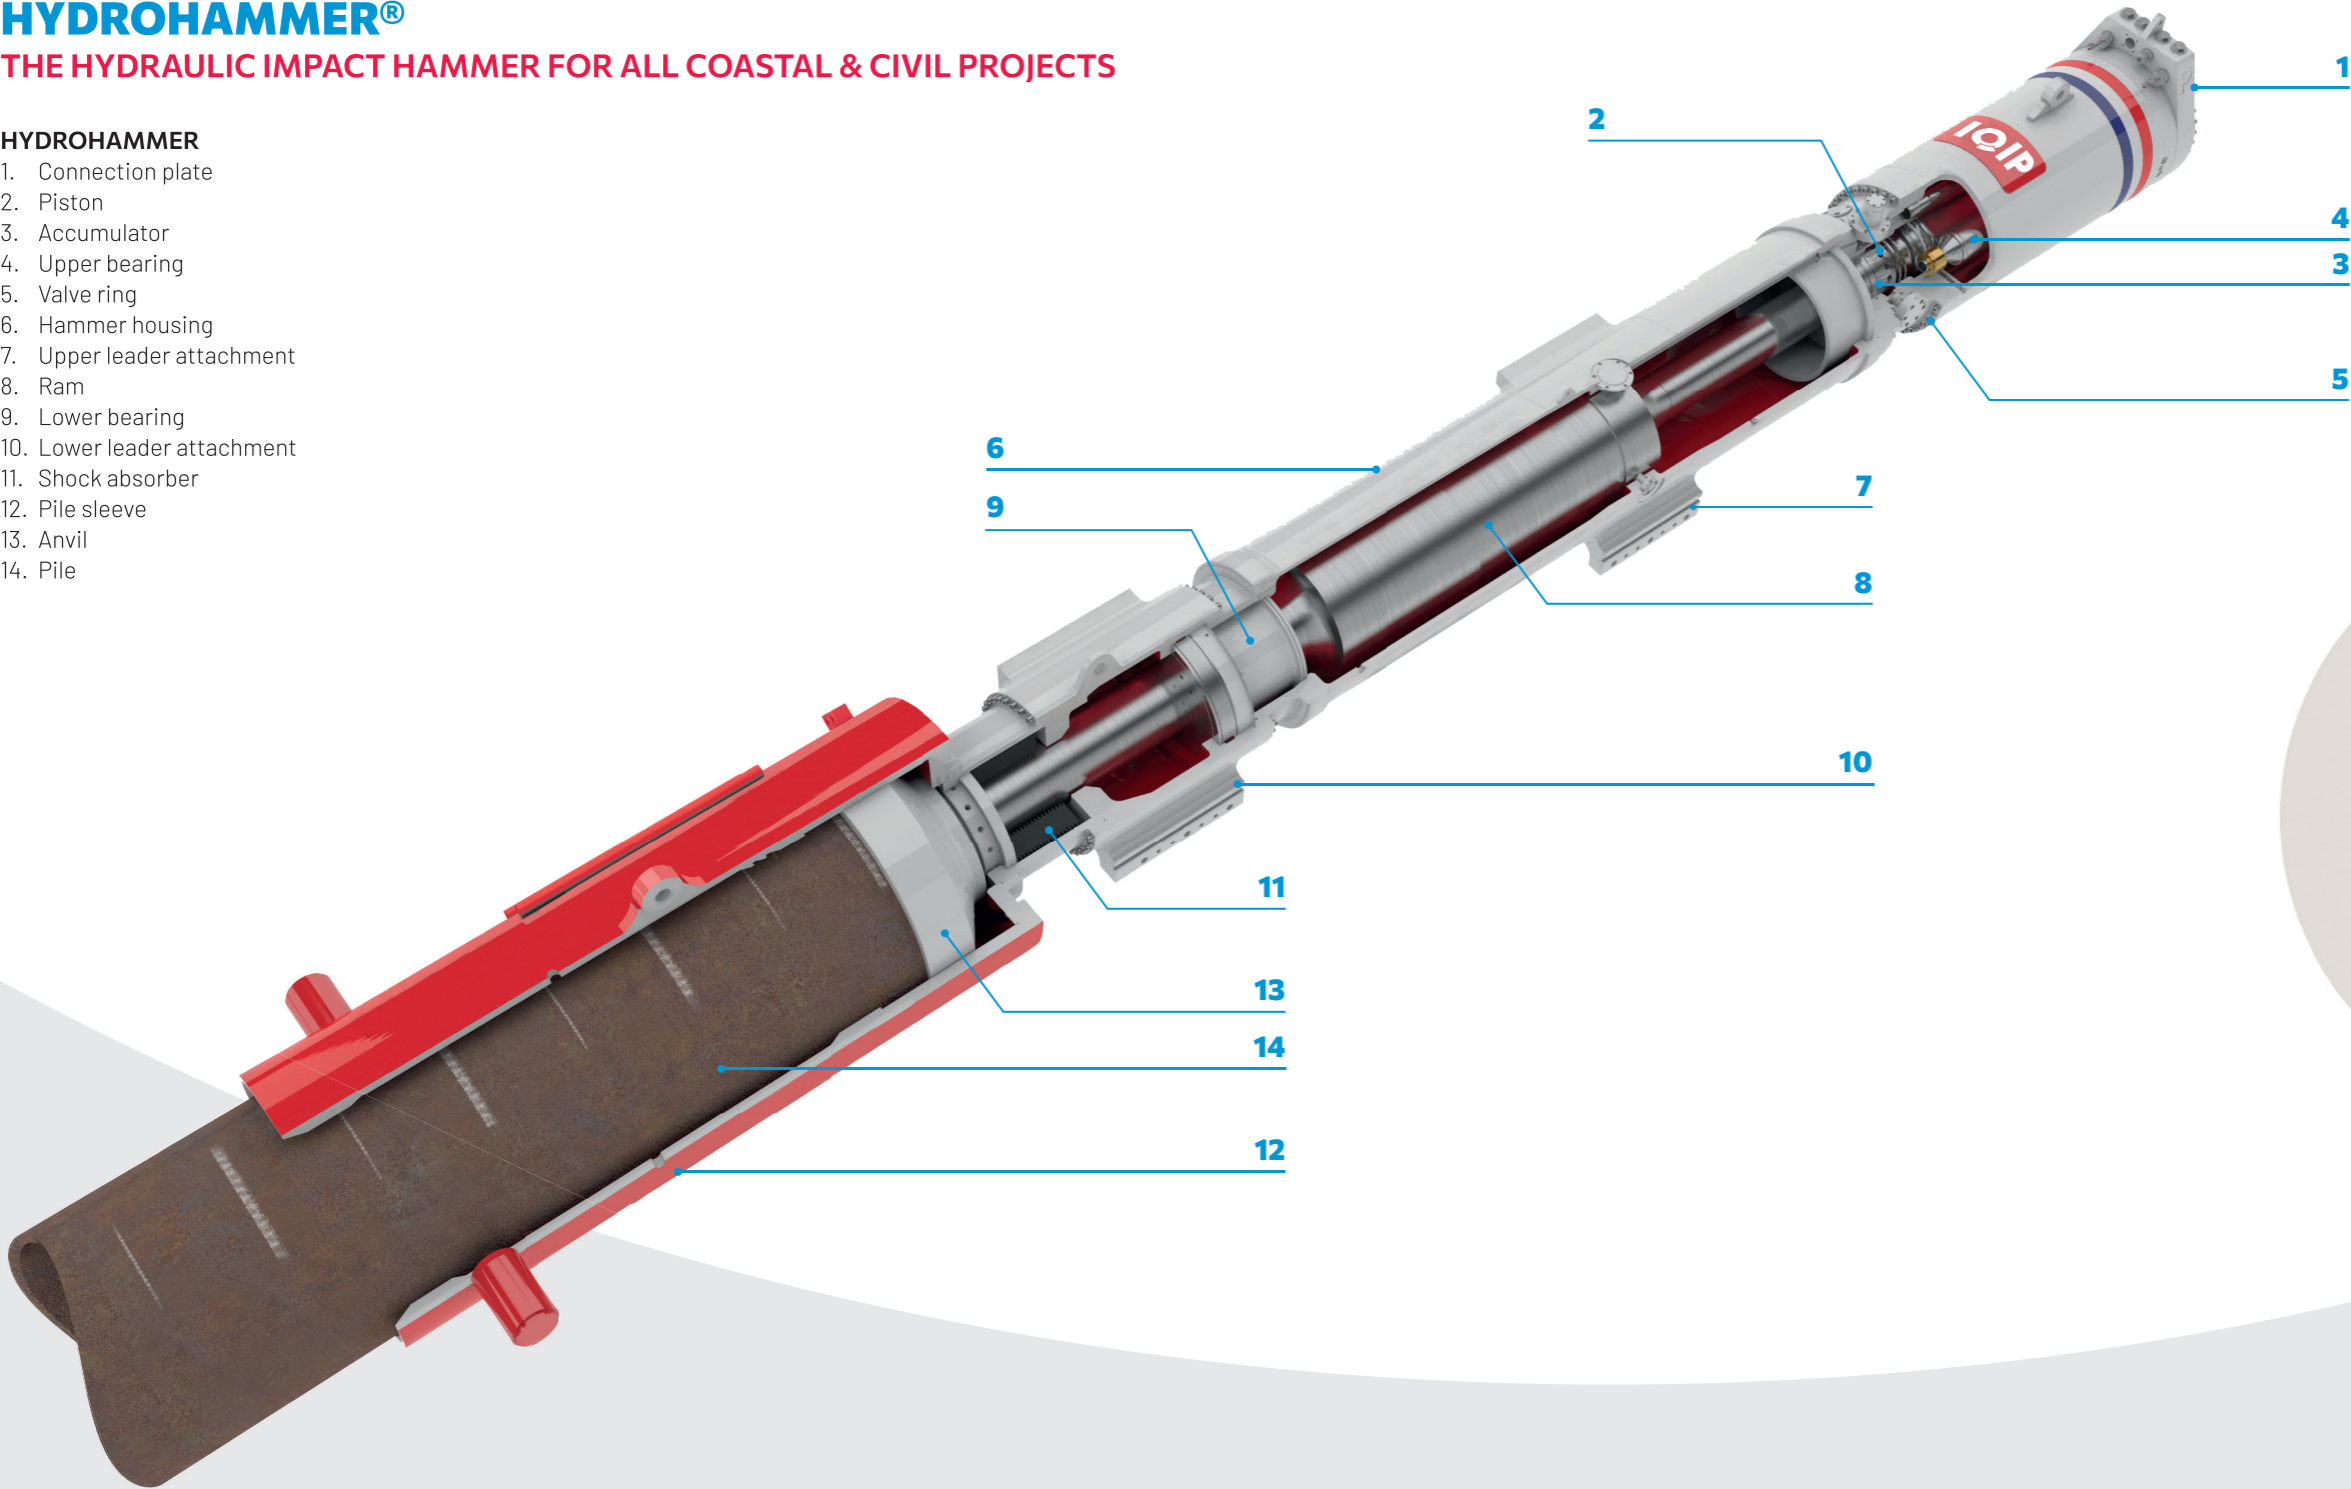

OPERATING PRINCIPLE

The operating cycle begins with the lifting phase of the ram (ram weight, ram pin and piston rod are forged in one piece). Here, valve P in the pressure line is opened and valve R in the return line is closed. When the preset stroke position is reached, the valves are automatically reversed allowing the ram to start its downward stroke. The ram is accelerated by gravity and by the pressure of the gas above the piston and reaches a maximum acceleration of 2g. This reduces the

maximum stroke that is required and at the same time increases the blow rate of the hammer.

After impact, the cycle is repeated automatically. Due to the independently set acceleration force, the Hydrohammer can operate at any inclination – even horizontally. The hammer can operate leader-guided or free-hanging.

HIGHLIGHTS

- Energy transfer: Steel-to-steel energy transfer ensures extremely high peak force in the pile.
- Solid piece Ram: Ram weight, ram pin and piston rod are forged into one piece, eliminating the risk of the parts separating.
- Material: Forged alloy steel guarantees durability and allows unlimited piling on steel at full power.
- Shock absorber: The robust and tested construction sustainably resists the reaction forces from the pile.
- Multifunctional: Suitable for operation above and below the water.

•

Acceleration energy: Relatively low weight and high peak force ideal to overcome soil resistance.

•

Hammer control: Adjustable blow count per minute and impact energy.

•

Real time monitoring: Piling data is directly printed on site and/or stored to allow detailed analysis.

•

Environmentally friendly: Biodegradable oil can be used, and noise reduction is optimised with noise reduction packages.

HYDROHAMMER®

THE HYDRAULIC IMPACT HAMMER FOR ALL COASTAL & CIVIL PROJECTS

TECHNICAL DATA

IMPERIAL

HAMMER S		S-30	S-40	S-70	S-90	S-120	S-150	S-200	S-280	S-350	S-500
Max. blow energy	lb.ft	22,127	29,503	51,630	66,381	88,508	110,638	147,513	206,518	258,147	368,781
Min. blow energy*	lb.ft	2,213	2,950	5,163	6,638	8,885	11,063	14,751	20,652	28,765	36,878
Blowrate	bl/min	65	65	50	46	44	44	45	45	40	45
Weight, Ram	lbs	3,527	4,850	7,716	9,921	13,668	16,534	22,046	29,982	36,000	55,116
Weight, Hammer	lbs	8,599	10,362	18,298	21,348	31,526	35,714	56,878	67,240	72,000	126,764
Length, Hammer	ft	20.00	22.47	24.28	26.43	26.79	29.20	29.84	34.09	37.35	39.18
Oil flow	g/min	46	46	66	66	122	122	185	185	211	423
Preferred power pack type		P 250	P 250	P 250	P 250	P 460	P 460	P 700	P 700	P 700	O.R.

HAMMER S		S-600	S-800	S-1200	S-1400	S-1800	S-2000	S-2500	IQ2	IQ4
Max. blow energy	lb.ft	442,539	590,056	885,079	1032,952	1327,618	1475,131	1843,905	2655,224	3540,298
Min. blow energy*	lb.ft	44,254	59,005	88,508	103,259	132,762	147,513	199,141	281,748	292,812
Blowrate	bl/min	44	45	40	35	35	35	32	35	36
Weight, Ram	lbs	66,138	88,183	132,275	152,116	198,413	220,459	275,577	330,693	440,924
Weight, Hammer	lbs	141,093	182,981	308,642	326,279	454,145	487,213	573,201	639,340	947,987
Length, Hammer	ft	41.72	47.93	46.91	52.79	54.17	56.87	62.42	68.09	66.96
Oil flow	g/min	476	581	871	871	871	1162	1162	1347	1744
Preferred power pack type		O.R.	O.R.	O.R.	O.R.	O.R.	O.R.	O.R.	O.R.	O.R.

HAMMER SW		S-90 W		S-500 W	
Max. net energy	lb.ft	66,381		368,781	
Min. net energy*	lb.ft	6,638		36,878	
Blowrate	bl/min	46		26	
Weight, Ram	lbs	9,921		55,116	
Weight, Hammer	lbs	23,149		41,226	
Length, Hammer	ft	27.01		39.57	
Recommended water flow	g/min	66		264	
Preferred power pack type		P 460		P 460	

POWER PACK TYPE		P 250	P 460	P 700
Max. pressure	psi	5,076	4,786	4,931
Max. oil flow	g/min	66	122	185
Power	hp	228	526	700
Dimensions (LxWxH)	ft	11.46 x 5.05 x 6.71	13.22 x 5.07 x 7.30	15.91 x 6.23 x 7.69
Net. weight	lbs	7,495	11,905	14,550
Weight, incl. fuel and oil	lbs	9,921	14,991	20,943

* The standard minimal energy setting is about 10% of the hammer's maximum energy. When using the high frequency/low energy mode, the energy can be reduced to a minimum of 2% to 5%.

METRIC

HAMMER S		S-30	S-40	S-70	S-90	S-120	S-150	S-200	S-280	S-350	S-500
Max. blow energy	kNm (kJ)	30	40	70	90	120	150	200	280	350	500
Min. blow energy*	kNm (kJ)	3	4	7	9	12	15	20	31	39	50
Blowrate	bl/min	65	65	50	46	44	44	45	45	20	45
Weight, Ram	ton	1.5	2.2	3.5	4.5	6	7.5	10	14	18	25
Weight, Hammer	ton	4	4.7	8.5	10	14.5	16.5	27	31	36	60
Length, Hammer	mm	6100	6762	7418	8168	8296	8986	9130	10390	11384	11943
Oil flow	l/min	175	175	250	250	460	460	700	700	700	1600
Power pack type, preferred		P 250	P 250	P 250	P 250	P 460	P 460	P 700	P 700	P 700	O.R.

HAMMER S		S-600	S-800	S-1200	S-1400	S-1800	S-2000	S-2500	IQ2	IQ4
Max. blow energy	kNm (kJ)	600	800	1300	1400	1800	2000	2500	3600	4800
Min. blow energy*	kNm (kJ)	66	88	132	154	198	220	270	382	397
Blowrate	bl/min	44	45	38	35	35	35	32	35	36
Weight, Ram	ton	30	40	60	70	90	100	125	150	200
Weight, Hammer	ton	65	85	145	150	215	230	260	290	430
Length, Hammer	mm	12745	14535	14300	14945	16630	17370	19025	20755	20410
Oil flow	l/min	1800	2200	3300	3300	3300	4400	4400	5100	6600
Power pack type, preferred		O.R.	O.R.	O.R.	O.R.	O.R.	O.R.	O.R.	O.R.	O.R.

HAMMER SW		S-90 W		S-500 W	
Max. net energy	kNm (kJ)	90		500	
Min. net energy*	kNm (kJ)	9		50	
Blowrate	bl/min	46		26	
Weight, Ram	ton	4,5		25	
Weight, Hammer	ton	10.5		75	
Length, Hammer	mm	8238		12060	
Recommended water flow	l/min	250		1000	
Power pack type, preferred		P 460		P 460	

POWER PACK TYPE		P 250	P 460	P 700
Max. pressure	bar	350	330	340
Max. oil flow	l/min	250	460	700
Power	kW	168	328	515
Dimensions (LxWxH)	mm	3500 x 1540 x 2044	4015 x 1689 x 2225	4850 x 1900 x 2346
Net. weight	ton	3.4	5.4	6.6
Weight, incl. fuel and oil	ton	4.5	6.8	9.5

* The standard minimal energy setting is about 10% of the hammer's maximum energy. When using the high frequency/low energy mode, the energy can be reduced to a minimum of 2% to 5%.

No rights may be derived from the specifications given in this brochure. Changes may be made at any time without notice as a result of product changes or updates. All specifications are stated with reservations for conversion or printing errors.

