


IQIP Hydrohammer®

S-series

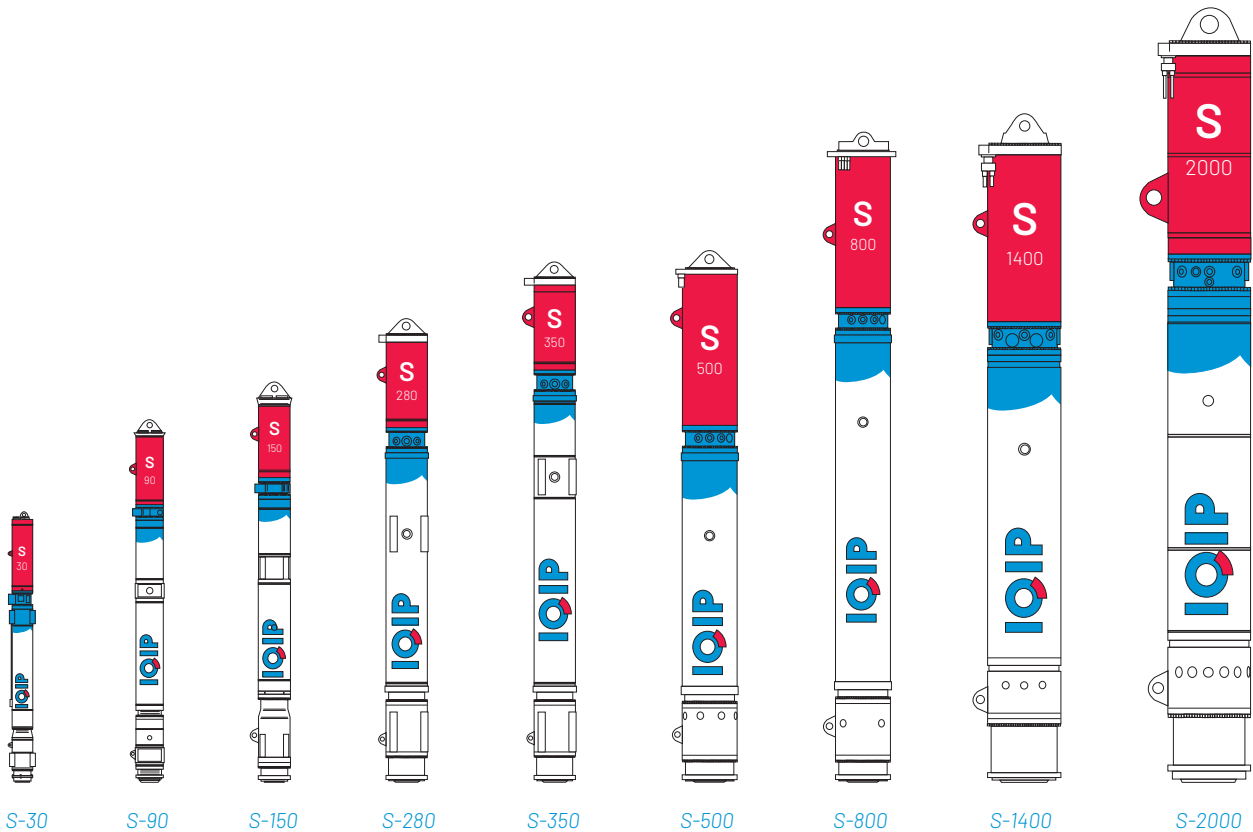

		S-30	S-90	S-150	S-280	S-350	S-500	S-800	S-1400	S-2000
Max. blow energy	kNm (kJ)	30	90	150	280	350	500	800	1400	2000
Min. blow energy*	kNm (kJ)	3	9	15	31	39	50	88	154	220
Blowrate	bl/min	65	46	44	45	20	45	45	35	35
Weight, Ram	ton	1.5	4.5	7.5	14	18	25	40	70	100
Weight, Hammer	ton	4	10	16.5	31	36	60	85	150	230
Length, Hammer	mm	6100	8168	8986	10390	11384	11943	14535	14945	17370
Oil flow	l/min	175	250	460	700	700	1600	2200	3300	4400
Power pack type, preferred		P 250	P 250	P 460	P 700	P 700	O.R.	O.R.	O.R.	O.R.

* The standard minimal energy setting is about 10% of the hammer's maximum energy. When using the high frequency/low energy mode, the energy can be reduced to a minimum of 2% to 5%.